



SafePace® 100 Driver Feedback Sign



Choice of faceplate colors available

The Traffic Logix® SafePace® 100 driver feedback sign is the solution that fits your budget.

This compact radar speed sign offers exceptional visibility and power efficiency in a lightweight and portable solution. Featuring the options you need at remarkably affordable pricing, the SafePace 100 driver feedback sign will help you keep your neighborhoods safe for years to come.

100 Specifications

Digit Size	11"
Height	29"
Weight	21 lbs
24/7, 365 Scheduling	✓
Data Collection	✓
Solar Compatibility	✓
Battery Operated	✓
Universal Mounting	✓
Cloud Compatibility	✓
Trailer Compatibility	✓
Dolly Compatibility	✓
Hitch Compatibility	✓
Warranty	2 Years

Features


Energy Efficient: The sign can function up to 3 weeks autonomously with optional battery power depending on volume.

Optimal Visibility: Unique light enhancing, anti-glare lens system as well as automatic ambient light adjustment provide brilliant visibility even in poor lighting conditions.

User Friendly: Software Interface: Easy-to-use management software lets you set sign parameters quickly and easily while optional data collection allows you to download traffic data, and generate statistical reports.

Stealth Mode: Collect baseline traffic data while speed display appears blank to motorists.

Speed Violator Strobe: Programmable flashing strobe to alert speeding drivers comes standard with every sign.

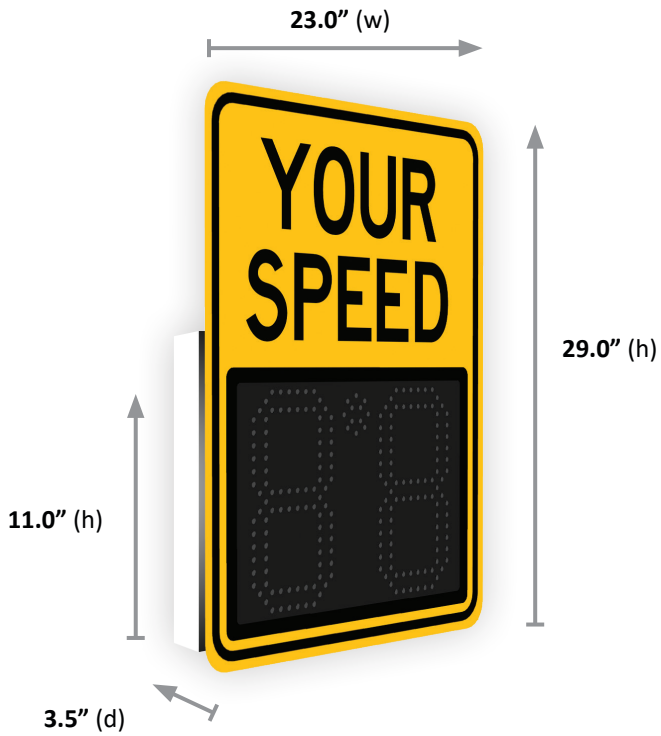

Feature	Specifications
Dimensions	
Digits	11"(h) x 5.6"(w), 98 LEDs per digit
Unit with "YOUR SPEED" sign mounted	Full size sign: 29.0"(h) x 23.0"(w) x 3.5"(d)
Sign Weight (includes "YOUR SPEED" sign (2 lbs) mounted)	
AC Powered	21 lbs
3 cell battery powered model	23 lbs
4 cell battery powered model	25 lbs
Solar powered model	23 lbs (not including solar panel or bracket)
General Specifications	
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or Kilometers per hour(km/h)
Faceplate	Yellow or white high-Intensity prismatic reflective sheeting on sign face with black colored text MUTCD approved colors and format

Feature	Specifications
Bashplate	Aluminum, 0.25"
Communications	Bluetooth (standard) GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software SafePace Cloud remote sign management 24/7 365 day unlimited programming and scheduling
Power Options (Electrical Specifications)	
AC power input	100~240 V AC
DC power input	12 V DC
Solar panel options	20W, 50W
Radar	
Internal	SS300 Doppler (FCC approved)
Radar RF out	5 mW maximum
Radar f-center	24.125 GHz or 24.200 GHz
Pickup distance	Up to 300 feet
Beam	38° x 45°, Linear polarization
CE Mark	Yes
Display	
LEDs	208
Digits	196 Amber, 23°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strokes	12 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	208
Ambient light sensors	1 sensor and automatic brightness control
Enclosure	
Construction	12 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant Non-sealed and ventilated
Warranty	
Sign	2 years
Batteries	1 year