



# SafePace® 100 Driver Feedback Sign



*Choice of faceplate colors available*

The Traffic Logix® SafePace® 100 driver feedback sign is the solution that fits your budget.

This compact radar speed sign offers exceptional visibility and power efficiency in a lightweight and portable solution. Featuring the options you need at remarkably affordable pricing, the SafePace 100 driver feedback sign will help you keep your neighborhoods safe for years to come.

## 100 Specifications

Digit Size	11"
Height	29"
Weight	21 lbs
24/7, 365 Scheduling	✓
Data Collection	✓
Solar Compatibility	✓
Battery Operated	✓
Universal Mounting	✓
Cloud Compatibility	✓
Trailer Compatibility	✓
Dolly Compatibility	✓
Hitch Compatibility	✓
Warranty	2 Years

## Features


**Energy Efficient:** The sign can function up to 3 weeks autonomously with optional battery power depending on volume.

**Optimal Visibility:** Unique light enhancing, anti-glare lens system as well as automatic ambient light adjustment provide brilliant visibility even in poor lighting conditions.

**User Friendly:** Software Interface: Easy-to-use management software lets you set sign parameters quickly and easily while optional data collection allows you to download traffic data, and generate statistical reports.

**Stealth Mode:** Collect baseline traffic data while speed display appears blank to motorists.

**Speed Violator Strobe:** Programmable flashing strobe to alert speeding drivers comes standard with every sign.

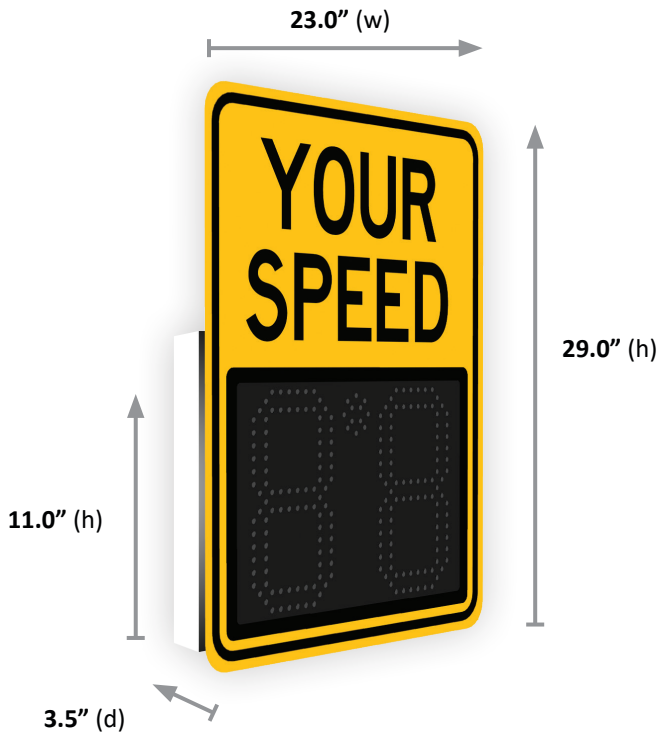

Feature	Specifications
<b>Dimensions</b>	
Digits	11"(h) x 5.6"(w), 98 LEDs per digit
Unit with "YOUR SPEED" sign mounted	Full size sign: 29.0"(h) x 23.0"(w) x 3.5"(d)
<b>Sign Weight (includes "YOUR SPEED" sign (2 lbs) mounted)</b>	
AC Powered	21 lbs
3 cell battery powered model	23 lbs
4 cell battery powered model	25 lbs
Solar powered model	23 lbs (not including solar panel or bracket)
<b>General Specifications</b>	
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or Kilometers per hour(km/h)
Faceplate	Yellow or white high-Intensity prismatic reflective sheeting on sign face with black colored text MUTCD approved colors and format

Feature	Specifications
Bashplate	Aluminum, 0.25"
Communications	Bluetooth (standard) GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software SafePace Cloud remote sign management 24/7 365 day unlimited programming and scheduling
<b>Power Options (Electrical Specifications)</b>	
AC power input	100~240 V AC
DC power input	12 V DC
Solar panel options	20W, 50W
<b>Radar</b>	
Internal	SS300 Doppler (FCC approved)
Radar RF out	5 mW maximum
Radar f-center	24.125 GHz or 24.200 GHz
Pickup distance	Up to 300 feet
Beam	38° x 45°, Linear polarization
CE Mark	Yes
<b>Display</b>	
LEDs	208
Digits	196 Amber, 23°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strokes	12 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	208
Ambient light sensors	1 sensor and automatic brightness control
<b>Enclosure</b>	
Construction	12 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant Non-sealed and ventilated
<b>Warranty</b>	
Sign	2 years
Batteries	1 year